


I N F I N I T E



S Y S T E M S

ND 216 HP V4


A 3-Way Full Range High Efficiency Speaker System, Slim Compact Trapezoidal MDF reduced resonance enclosure, loaded with dual 6.5" Ultra High Efficiency Neodymium Low/Low Mid Frequency Transducers and a 1" Neodymium High Frequency Compression driver with a 1.75" Voice Coil, mounted on a 90° x 60° constant directivity, injected rotatable horn. Grille material shall be a robust 16-gauge 316L Stainless Steel, Neutrik Connector. Standard finish color is textured black and is also available in any custom color, 5-year Limited Commercial Warranty.

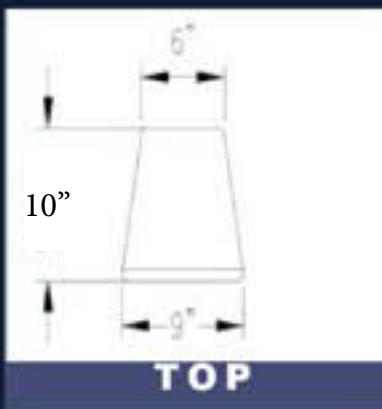

TOP



FRONT

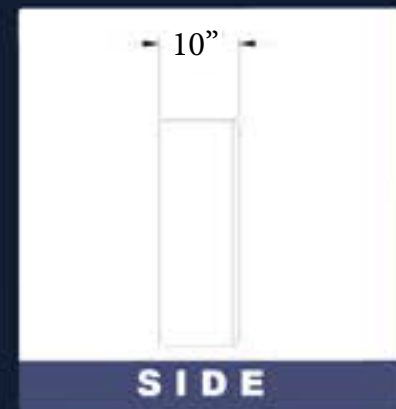

SIDE

TECHNICAL DATA

Utility Configuration	Full-Range 3 Way Speaker System Vented Dual 6.5" Neodymium Low and Low Mid Cone Transducers with 1.00" Exit High Frequency Neodymium Compression Driver with 1.75" Voice Coil
Nominal Impedance	4 ohms
Rated Power RMS	600W
Sensitivity 1W/1M	98 db
Applied Range	70Hz to 20kHz
Rotatable Coverage	90° x 60°
Connectors	NL-4
Net Weight	34lbs / 15.4 kg
Finish Color	Black or Custom
Grille/Protection	316L Stainless
Warranty	60 Month Limited Commercial
Dimensions	9" W X 9 3/4"D X 28"H inches

WP WEATHER PROTECTED VERSION

- Constructed of Treated Exterior Composite wood panel, which is vermin, termite and mold resistant, without sounding like plastic or fiberglass.
- 316L Stainless Steel Grille for maximum corrosion resistance in the harshest environments.
- 1/4" acoustically transparent foam water stop layer.
- 100 micron 316L Stainless Steel Mesh for insect resistance in outdoor use within landscape environments.
- Weatherized component treatment for long term reliability.
- Watertight junction box for secure connections and vandal resistance on larger properties.
- All Stainless Steel Hardware for reliable, long term outdoor installation.